


AF30气爪



缸径 (mm)	开闭范围 (mm)	夹持力(N)		最大附件 长度(mm)	产品重量 (kg)
		开	闭		
20	8	94.8	85.0	50	0.14
25	12	150.6	136.9	60	0.30
30	16	222.5	198.2	77	0.47
40	20	398.2	349.7	100	0.81
50	26	611.3	547.8	127	1.37
63	32	961.4	863.3	160	2.60
90	50	1550.0	1451.9	200	4.80
125	70	2960.1	2898.5	240	13.90


型号表示方法



产品特性


- 利用锥型滑动的楔型面压驱动方式；
- 简洁的结构和多样的连接方式；
- 使用背面端口(BP选择)，可以省略气压排管管道，可节省空间、追求方便性；
- 只能安装接近传感器。

锥形滑动式结构

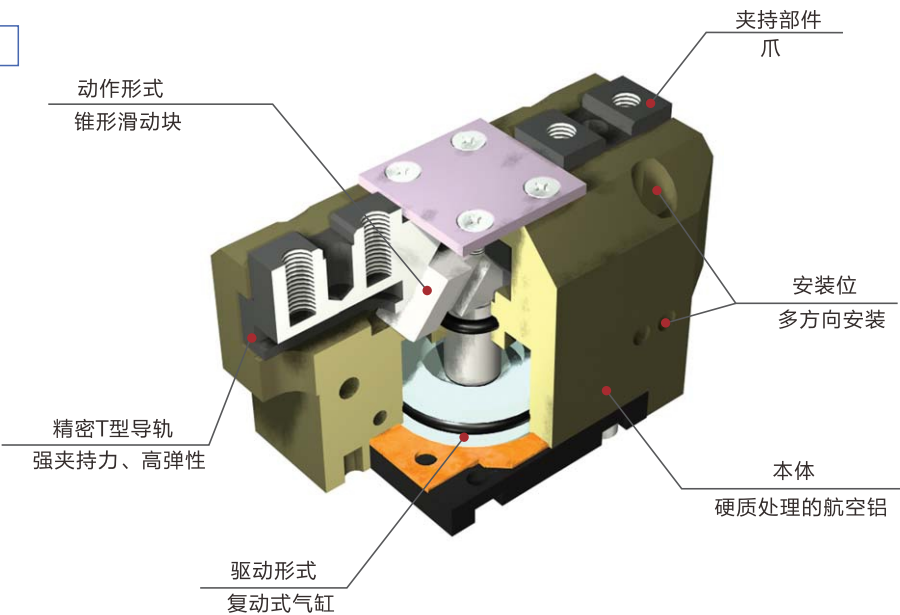


AF30-20

外形尺寸图

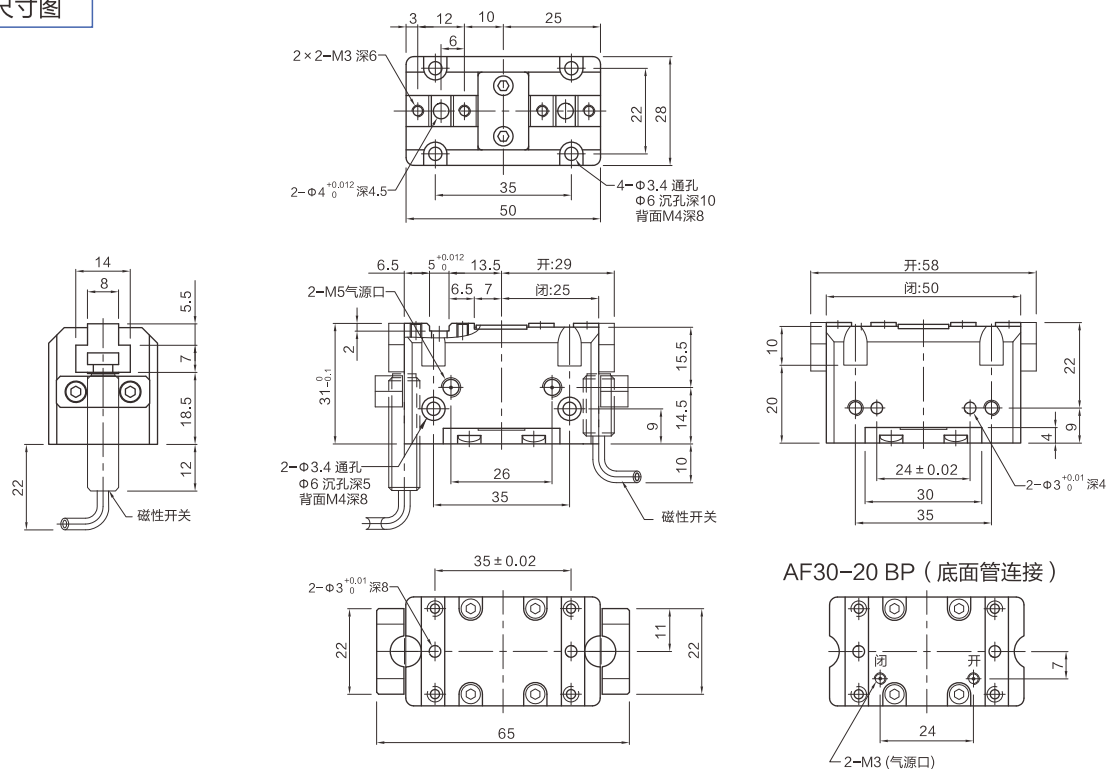


AF30-25

外形尺寸图

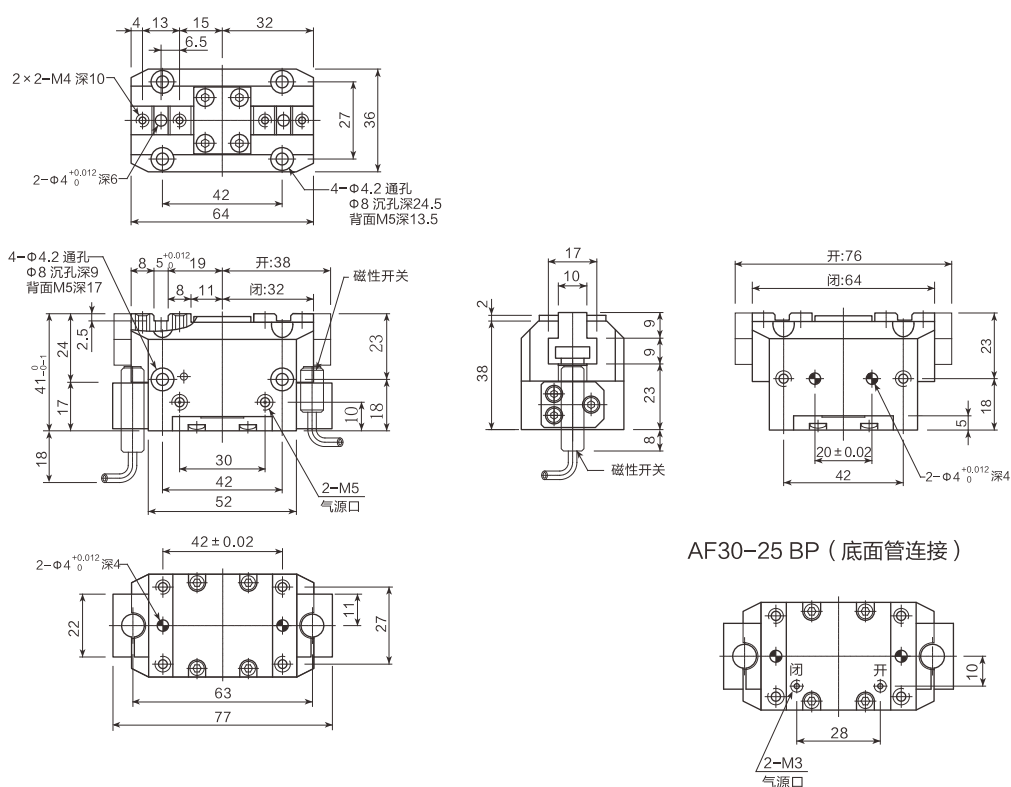


AF30-30

外形尺寸图

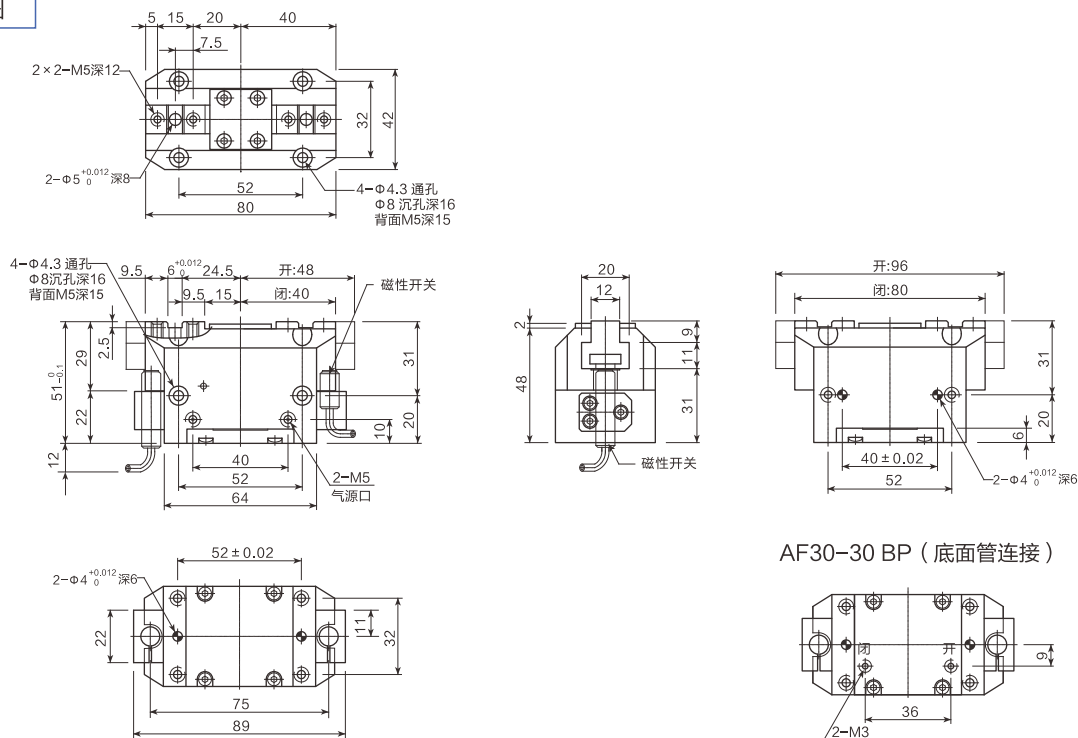




AF30-40

外形尺寸图

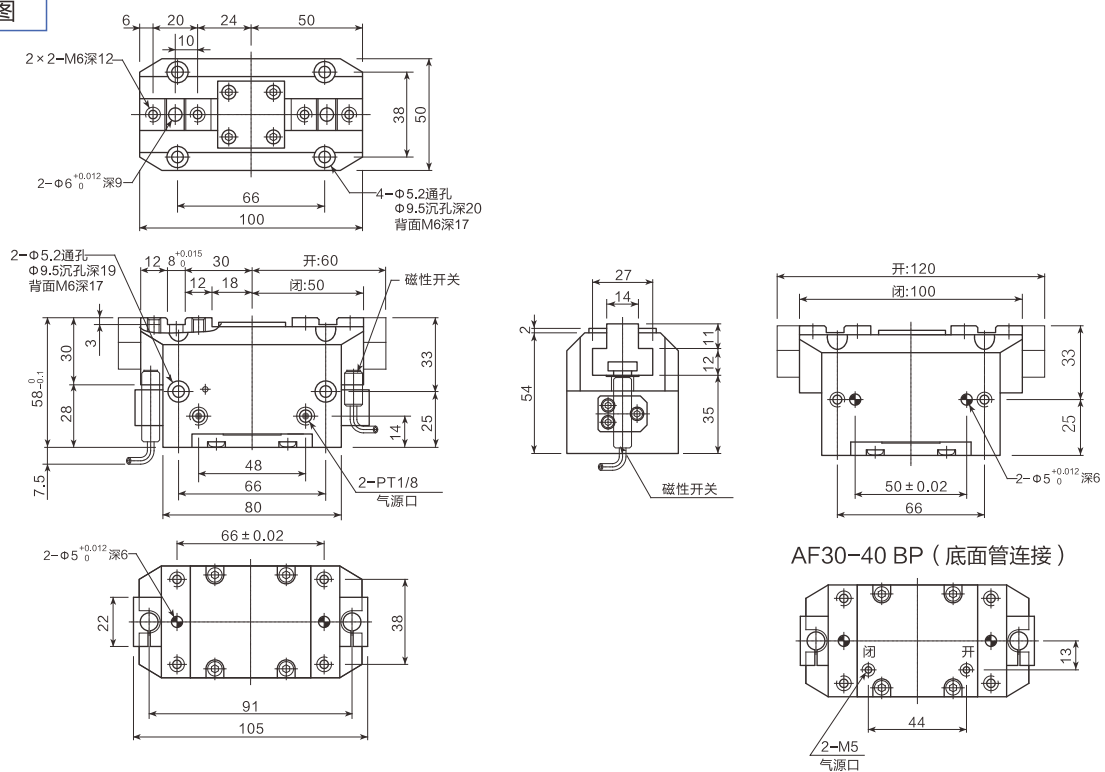


AF30-50

外形尺寸图



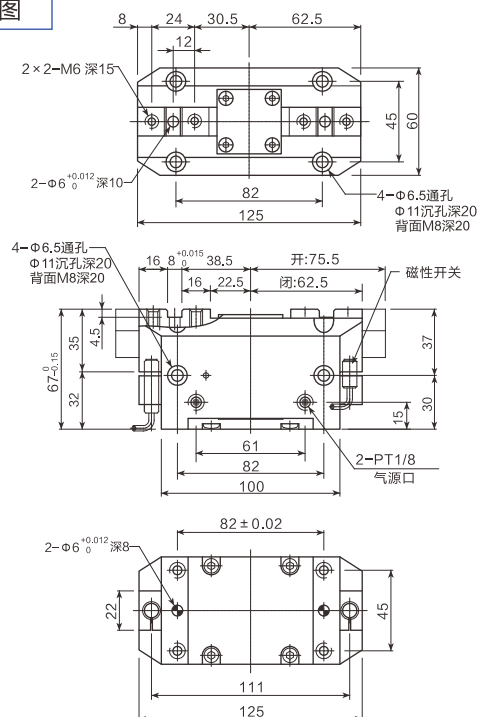


AF30-50 BP (底面管连接)




AF30-63

外形尺寸图

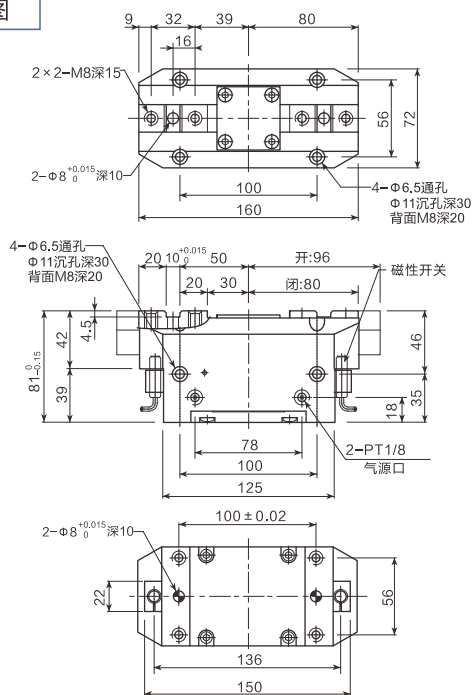


AF30-63 BP (底面管连接)



AF30-90

外形尺寸图

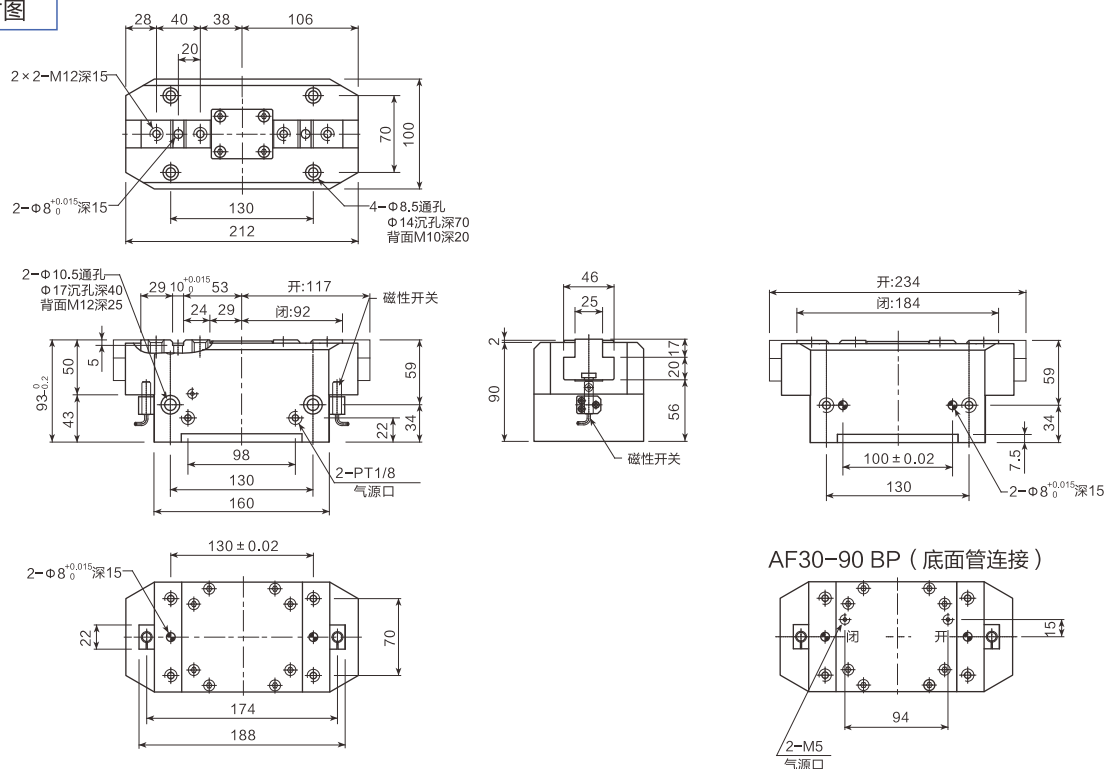

AF30-125

外形尺寸图

